# Installation Instructions for LED Mirror

1. Installation tools (as shown below)

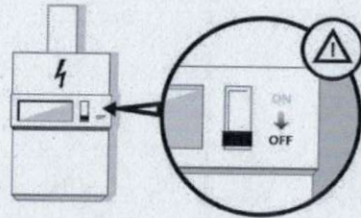| Flexible rule | Leveling instrument | Churn drill | Screwdriver | Hammer |

2. Make certain the wall is solid, and the main electricity supply has been power-off

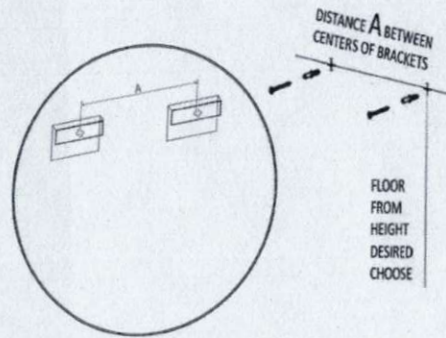3. Open the carton and make sure all the parts listed below are present

1X
2X
2X

4.
① Use the flexible rule to measure the center distance between two hardy holes on the mirror (**Distance A**)

②mark a desired height of the mirror. Choose the churn drill with an appropriate drill bit to make two holes on the marked places.
③Use the hammer to strike the expansion rubber plug in accessory bag into the holes on the wall,and then use a screwdriver to tighten the screws into the holes.
④Insert the plug.

DISTANCE A BETWEEN CENTERS OF BRACKETS

FLOOR FROM HEIGHT DESIRED CHOOSE

5. Hang the mirror onto the screw crossing two hardy holes to fixed it. Finally, switch the power, and touch the sensor to test the product.

Operating instruction:

1. Turn on LED light and anti fog funtion

①Power on, short press to turn the light on, press the sensor again to turn the anti fog function on. When anti fog funtion is turned on, the sensor is in **blue light**.

2. Adjust the led brightness and light color

①Long press the touch switch to adjust the LED light brightness(from 3000K-6500K)

3. Turn off LED light and anti fog funtion

①When the led light and anti fog is working, press the sensor again to turn them off.